



HEADQUARTERS

No. 186, Yong Chi Road, Taipei, Taiwan.
Tel: +886-2-2763-9696 Fax: +886-2-2768-0636/37/39
www.ffg-tw.com
E-mail: chairon@fairfriend.com.tw



ISO 9001
ISO 14001



FAIR FRIEND GROUP

MACHINE TOOLS DIVISION

No. 12, Jingke Rd., Nantun Dist., Taichung City, Taiwan
Tel: +886-4-2359-4075
Fax: +886-4-2359-4873
www.feeler.com
E-mail: sales@feeler.com



Website



Facebook

The CNC Machine Tool Builder with

PERFORMANCE Beyond EXPECTATION

www.feeler.com



Our Innovation, Your future

FEELER'S SUCCESS YOUR PROSPECTS

Working with a right partner multiplies your performance. FFG (Fair Friend Group) provides the world with a diversity of machine tools and reaches multiple successes with its proactive, effective strategic formula - intensive R&D engineering, worldwide production sites, global

marketing through overseas subsidiaries, along with cutting-edge technology, uncompromising quality and thorough service. As the world's top machine tools maker, FFG offers far beyond machinery products but total solutions and ultimate value.

OUTSTANDING HIGHLIGHTS

- World 3rd Largest Machine Tools Group.
- World No. 1 Largest Machine Tools Group For Automotive Turnkey.
- No.1 VMC manufacturer in the world since 2009, with 8,000 units; over 10,000 units production outputs in 2011.
- HVTG Fair Friend College of Electromechanics attracts 2,300 students as FFG's talent tank.
- 2012 TAIWAN authoritative commercial magazine "Common Wealth" TOP 1000 manufacturers: Fair Friend Ent. Co., Ltd and Good Friend Int'l Holdings Inc. ranking No.1 for Machinery Industry and Machine Tools, respectively.

- In "Excellence in Research and Innovation" Awards, TIMTOS 2011, FFG won 3 awards as the biggest winner.
- The largest sole advertise sponsor and the largest Taiwanese exhibitor at both EMO and TIMTOS 2009/2011/2013/2015.
- Won the prize of 2008 AI Outstanding Product Award and was in the TOP 100 excellence equipment suppliers, together with world-famous machine tool manufacturers such as DMG, MAZAK, MORI SEIKI, MAKINO, MAG and Agie Charmilles. FFG ranked NO.1
- The best quality and service machine tools manufacturer from Taiwan – evaluated by Asia Pacific Metal Working Equipment News.
- The only Taiwanese machine tools maker won the National Quality Award and the Taiwan Excellence Gold Award.
- The only machine tools group reported by Forbes, Business Week, the Wall Street Journal, National TV in Spain and China central TV.
- 2011, awarded "TAIWAN Top 100 Brands" by Taiwan Ministry of Economic Affairs, as a high recognition to FFG and FEELER.



Your Best PARTNER for Machine Tools

FFG MACHINE TOOL DIVISION

Fair Friend Group, one of the globally major machine tool builders, provides the world with quality machine tools by the synergy from its teams of more than 4,000 dedicated employees. Every year more than 10,000 units of machine tools are well produced from all our sites which scatter in Taiwan, China, Japan, the U.S.A. and Italy. A complete product lineup ranges from vertical / horizontal/double column machining centers, vertical/horizontal turning centers, large CNC boring & milling centers, various types of grinders, large floor boring machines, 5-axis machining centers to double column CNC grinding machines – a truly one-stop machine tool maker meets all your needs. Since its establishment in 1979, Fair Friend has been investing intensive endeavors

into providing advanced machinery technology for a better tomorrow. "Integrity, Quality, Innovation, Unceasing Improvements, Customer First, Continuous Growth" are the very core values and cornerstones where Fair Friend's crew build up prosperity and pride. Along with capabilities of quality manufacturing, cost down production, extensive service network and throughout sales channels, we are rewarded with a leading reputation among all the Taiwanese machine tool builders and have kept reaching new pinnacles. Nevertheless, as climb higher we look even higher. "World No. 1 Machine Tool Builder," isn't a goal for inspiring but implementing. Sticking to our formula of success and keen ambition, Fair Friend is turning a great vision into reality.



▲ Fair Friend - Nantun, TAIWAN

FFG

96 companies
3 Listed company
2 in Taiwan
1 in HK

Machine Tool Division

37 brands / 50 Production bases

Industry Equipment Div.

9 brands / 23 Production bases

Green Energy Division

7 brands / 7 Production bases

TAIWAN Division

6 Production bases

FEELER

LEADWELL

SANCO

EQUIPTOP

ECOCA

WAIDA-FEELER

CHINA Division

12 Production bases

Hangzhou Good Friend x 3

Hangzhou Leadwell

Hangzhou Ever Friend

Hangzhou Glory Friend

Feeler Takamaz

Hangzhou Feeler Mectron

Hangzhou Union Friend

Hangzhou Youzhao

IKEGAI (Shanghai)

DMC (Yantai)

OVERSEA Division

32 companies

FT Japan

SEC Japan

TAKEUCHI Japan

IKEGAI Japan

SNK X2 Japan

Nisshin Japan

Hessapp Germany

Modul Germany

Witzig & Frank Germany

VDF Boehringer Germany

Honsberg Germany

PIFFNER Germany

MAG Eislingen /Fils Germany

MAG Rottenburg Germany

JOBS Italy

IMAS Italy

RAMBAUDI Italy

SACHMAN Italy

SIGMA Italy

MECCANODORA Italy

MORARA Italy

TACHELLA Italy

SMS USA

MAG Sterling Heights USA

MAG Port Huron USA

PIFFNERx2 Switzerland

MAG Bangalore India

DMC Korea

DSK Korea

MAG Kecskemet Hungary

Data as of May, 2018

FFG FAMILY

From a distributor of Japanese KOBELCO steel and construction machinery in its early years, Fair Friend Enterprise Co., Ltd has outgrown into a diverse and dynamic businesses group. Rooted in and nourished by machine tool manufacturing, FFG consists of Machine Tool Division, PCB Division, Equipment Division, and Green Energy Division. Machine tools, pneumatic tools, general equipment, construction machinery, PCB, LCD screens, forklifts, elevators, painting equipment, parking tower, etc. – FFG is fabricating a better future in everyday life.



▲ Leadwell, TAIWAN



▲ Ecoca, Sanco, TAIWAN



▲ Equiptop, TAIWAN

Deep Market Penetration in CHINA

FFG's early entrance into the Chinese market in 1993 resulted in a solid foundation for our success today. Our state-of-art manufacturing facilities and precise workmanship deliver quality machine tools that help our customers achieve productivity and profitability. Zhejiang Province is FFG's production stronghold. The production plants scattering over 3 major industrial bases provide remarkable productivity to satisfy enormous local demands. 90 branch offices located all over China weave an expansive sales and service network. Furthermore, FFG set up Fair Friend Institute of Electromechanics in 2008 to develop more talents for the future.



Good Friend China Headquarters, CHINA



Hangzhou Good Friend -HsiaoSha (66,000 m²), CHINA



Hangzhou Good Friend - Xiasha Technology Park (231,000 m²), CHINA



Hangzhou Takamaz




Hangzhou Good Friend - Jiangdong Technology Park (660,000 m²), CHINA




Glory Friend / ANEST IWATA



Hangzhou Every Friend (82,500 m²), CHINA

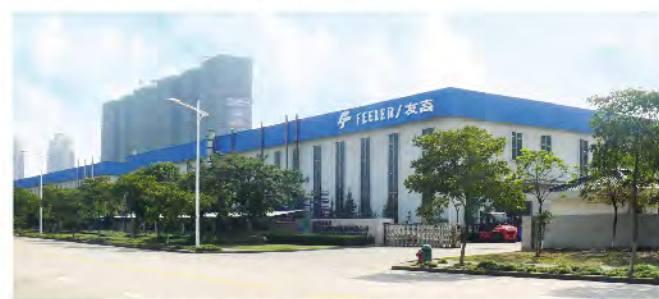

Hangzhou Global Friend (59,400 m²), CHINA

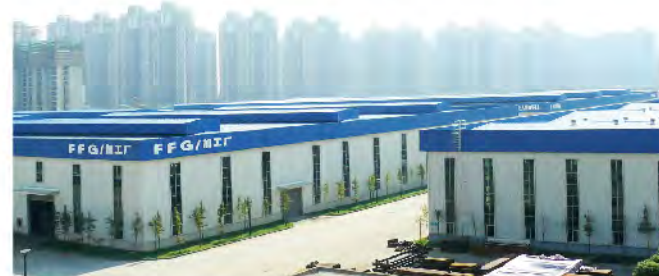

Hangzhou Leadwell (66,000 m²), CHINA



Fair Friend Institute of Electromechanics

Fair Friend Institute of Electromechanics was established in 2008, located in Xiasha Economy Development District, Hangzhou. It consists of departments of machinery design and manufacture, mold design and manufacture, automated electromechanics, etc. 2,300 students are well educated here to be professional, quality manpower for machinery industry. Ample training resources, 100% employment rate, award-winning credits make Fair Friend Institute of Electromechanics ranking Top 3 amid 3-year vocational colleges in Zhejiang. Every year some 800 graduates join FFG as their first choice for career.



Global Scale Technology and Marketing

HESSAPP

Established : 1946
Joined FFG : 2013
Vertical turning centers



MODUL

Established : 1900
Joined FFG : 2013
Gear hobbing,
chamfering
machining centers



Witzig & Frank

Established : 1865
Joined FFG : 2013
Multi-spindle and
multi-station machine
centers



VDF BOEHRINGER

Established : 1844
Joined FFG : 2013
Turning Centers



Pfiffner

Established : 1989
Joined FFG : 2015
Rotary Transfer
Machines



MAG Eisingen/ Fils

Established : 2005
Joined FFG : 2015
Milling, coldforming,
CV joint, transfer
centers and manu-
facturing systems



MAG Rottenburg

Established : 2005
Joined FFG : 2015
Spindles , Rotary tables



MAG Bangalore

Established : 2005
Joined FFG : 2015
Application technology



DMC

Established : 1944
Joined FFG : 2015
Vertical / Horizontal
machining centers ,
hydraulic parts

DSK MACHINERY

Established : 1995
Joined FFG : 2016
CNC Heavy Duty Machines
(Horizontal Lathe, Vertical
Lathe/Double Column
Machining Center, Roll Grinder)



Pfiffner

Established : 1970
Joined FFG : 2015
Rotary Transfer Machines,
Retrofit machines



MAG Kecskemet

Established : 2005
Joined FFG : 2015
ATC
Chip conveyor
Components



MAG Changchun

Established : 2005
Joined FFG : 2015
Vertical / Horizontal
machining centers ,
Coldforming machines



QUALITY
is vital at FEELER

Through M&A and joint venture, FFG strengthens technological and global marketing power effectively. Advanced technologies are transferred and applied in our machine tool products to offer our users the quality and performance beyond their expectation. Our joint ventured corporations or subsidiaries are set in Japan, the US, Germany and Italy, the countries where cutting-edge machinery technologies are cradled. FFG's overseas bases also build up extensive, worldwide distribution channels. In most corners of the world, you can have excellent machine products and technical supports delivered by FFG. We will just be there for you.

SNK

Established : 1949
Joined FFG : 2016
FMS/FMC systems, Bridge Type
Multi-Centers, Machine Tools for
Aircraft Parts, Roll Lathes, 3D
Measuring Machines, Various
Types of Machining Centers



SNK NISSIN

Established : 1952
Joined FFG : 2016
Vertical/Horizontal
Machining Center,
Large lathe, Grinder



Takeuchi

Established : 1945
Joined FFG : 2006
PCB drilling machine



FPT

Established : 1961
Joined FFG : 2008
FFG and TAKAMAZ joint venture
corporation, as sales & service base of
FFG CNC machine tools. Also a J.V.
production site in China.



IKEGAI

Established : 1889
Joined FFG : 2014
Large turning centers
Plastic injection molding machines
Engine/generator manufacturing
Printing equipment
Packaging machinery equipment



SMS

Established : 1854
Joined FFG : 2007
Integrated Systems, Vertical
Turning Lathes, Universal
Trimming Machines.



MAG Port Huron

Established : 2005
Joined FFG : 2015
Horizontal machining
centers, Transfer lines ,
Turnkey



JOBS

Established : 1978
Joined FFG : 2011
Large high speed and
power 5-axis milling
centers

SACHMAN

Established : 1962
Joined FFG : 2011
Large milling column
milling centers

SIGMA

Established : 1950
Joined FFG : 2011
5 axis vertical machining
centers.

RAMBAUDI

Established : 1945
Joined FFG : 2010
Gantry type 5-axis
milling centers



meccanodora

Established : 1961
Joined FFG : 2017
Internal and external grinding
machines, multi-technology with
integrated grinding, turning and
milling technology

MORARA

Established : 1919
Joined FFG : 2017
Internal and external grinding
machines, multi-technology with
integrated grinding, turning and
milling technology

TACHELLA

Established : 1921
Joined FFG : 2017
Internal and external grinding
machines, multi-technology with
integrated grinding, turning and
milling technology



IMAS

Established : 1948
Joined FFG : 2016
Multi-tasking rotary table
transfer machines



MAG Sterling Heights

Established : 2005
Joined FFG : 2015
Horizontal machining
centers, Transfer lines ,
Turnkey



Machine Tool Product Line

CNC

Turning ▶

FTC SERIES
CNC Turning Center
FTC-10 / 20 / 20L / 30



FTC-30

Slant Bed CNC Turning Center
FTC-300 / 350 / 350L(MC) / 350XL(MC)
350LY / 350SLY / 450(MC) / 640(MC) / 640L(MC)
FTB-350 / 350L / 350XL



FTC-640LMC

HT SERIES
CNC Turning Center
HT-30MC / 30Y / 30SY / 40Y



HT-30Y

FT SERIES
CNC Turning Center
FT-200 / 250 / 350 / 350AL



FT-250SY

FVT SERIES
Heavy Duty CNC Vertical Lathe
FVT-450 / FVT-600(MC) / FVT-800 /
FVT-1000(MC) / FVT-1600



FVT-600



FVT-1000MC

Milling ▶

VFP SERIES
Vertical Machining Center
VFP-800(A) / 1000(A) / 1300(A)



VFP-1000A

VMP SERIES
Vertical Machining Center
VMP-23(A) / 23Aapc / 30(A) / 32(A) / 32Aapc
40(A) / 45(A) / 50(A) / 65(A)



VMP-45A

QMP SERIES
Vertical Machining Center
QMP-23A / 23Aapc / 30A / 32A / 32Aapc / 40A



QMP-40A



QMP-32Aapc

HV SERIES
Vertical Machining Center
HV-32A / 32Aapc / 40A / 50A



HV-40A

NBP SERIES
Vertical Machining Center
NBP-1000(A) / 1100(A) / 1300(A)



NBP-1300A

VB SERIES
Vertical Machining Center
VB-1400(A) / 1650(A) / 1900(A) / 2200(A)



VB-1650A

U SERIES
5-Axis vertical machining center
U250 / 600P / 800 / 1000



U-600P



U-800

EH SERIES
Horizontal Machining Center
EH-320 / 320APC



EH-320

FMH SERIES
Horizontal Machining Center
FMH-400 / 500 / 630 / 800



FMH-630



FMH-800

TV SERIES
Drilling & Tapping Center
510A / TC-20a



TV-510A



TC-20a

SVW SERIES
Double Column Machining Center
SVW-2217-SVW-4223



SVW-2217

SDM SERIES
Double Column Machining Center
SDM-2216-SDM-7235



SDM-4220

SBM SERIES
CNC Bed Type Universal Milling Machine
SBM-2000H / 2500H / 3000H / 3500H
SBM-2000V / 2500V / 3000V / 3500V



SBM-2000V

SHM SERIES
CNC Horizontal Boring & Milling Machine
SHM-630L / 800 / 800L



SHM-800

SHB SERIES
CNC Horizontal Boring & Milling Machine (Extendable Spindle)
SHB-11025/11030/11040RS / SHB-11030/11040RM
SHB-13025/13030/13040RS / SHB-13030/13040 RM/RL



SHB-11025RS

FLEXIBLE Manufacturing System (FMS)



State-of-the-art MANUFACTURING Capabilites

WWW.FEELER.COM

Over the years, Fair Friend FEELER Machine Tools have earned a world-class reputation for product excellence and reliability. This success is the result of our innovative design, in-house machining capabilities, and rigorous quality control. In order

to manufacture machines that fully meet customers' requirements all around the world, we utilize an advanced and integrated manufacturing system. At the core of Fair Friend's manufacturing capabilities are our state-of-the-art production facilities.



Fair Friend's products are manufactured by a complete system of R&D, manufacturing, inspection, and testing. The pictures shown here are only a few of Fair Friend's most extensive manufacturing capabilities. This level of advanced manufacturing equipment, combined with the great care paid to every step throughout the manufacturing process, assures the optimum performance of each Fair Friend CNC Machine Tool.



Discover FEELER's R&D Edges

Constant breakthroughs establish Fair Friend with a reputation of "Innovation and Full Customer Satisfaction". Fair Friend is committed to providing the best possible machines to customers. One of the most important reasons for Fair Friend's product excellence is our "Total Dedication to R&D".

At Fair Friend, we emphasize R&D as a crucial factor to our success. At FEELER alone, R&D staff makes up one-third of the total workforce. In addition, we invest 4% of our annual revenue on R&D, per year. Our innovative brainpower can competently and efficiently fulfill your design and application requirements.




PRE-PRODUCTION SIMULATION SYSTEM

- 3D simulation for low cost high efficiency production.
- User-friendly, visualized marketing tool.
- In-time connection between simulation of auto control signals and the on-site machine is available.
- Simulations for best processing flow provide various possible plans for evaluation.
- Lowering investment risks, boosting investment decision-making.



REMOTE MONITORING SYSTEM

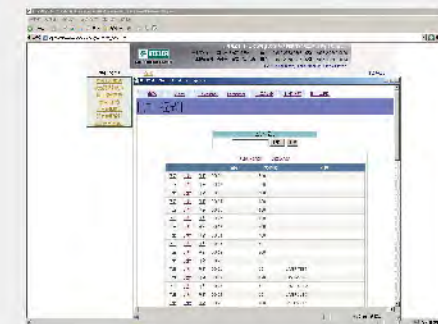

- Providing CNC machine tool remote operation or monitoring function.
- Remote diagnosis is available, which shortens trouble shooting time.
- Downtime is reduced and thereby improved efficiency is obtained.
- Facilitating plant digital management
- Reducing a great deal of cost and enhancing professionalism.


UNPARALLELED APPLICATION ENGINEERING

FEELER's rigid machine design and unparalleled Application Engineering capabilities are best demonstrated in this work piece. The top curvature surface of this work piece displays five letters of B1000. Each letter is machined with different height as follow: B (5μm), 1 (3μm), 0 (1 μm), 0 (0.5μm), 0 (0.3μm). This result is only possible through the combination of superb machine rigidity and breakthrough CAD/CAM technology.




FINITE ELEMENT ANALYSIS

FEELER'S machine structure is designed and analyzed using advanced Finite Element Analysis software for dynamic simulation and structural analysis. This design method assures optimum structural rigidity, machine accuracy and reliability.



OPTIMUM DYNAMIC RIGIDITY

Utilizing the advanced Finite Element Analysis (FEA), FEELER obtained an outstanding spindle design with optimum dynamic rigidity and resonance frequency.



REVERSE ENGINEERING

FEELER has abundant experiences in implementing Reverse Engineering, which is processed as below:



ZELSS 3D COORDINATE MEASURING MACHINE

FEELER utilizes the 3D Coordinate Measuring Machine (CMM) to inspect critical parts ensuring outstanding parts accuracy.



1. First measured via 3D Coordinate Measurement Machine (CMM)
2. and it creates a 3D Solid Modeling
3. This 3D Modeling generates the CAD/CAM parameters
4. and the part is machined via 5-Axis Machining Technology
5. A reverse-engineered work piece is created successfully



FTC-10 / FTC-20 / FTC-20L / FTC-30

MODEL	UNIT	FTC-10	FTC-20	FTC-20L	FTC-30
Swing over bed	mm	Ø510	Ø600	Ø600	Ø580
Standard turning diameter	mm	Ø180	Ø250	Ø250	Ø310
Max. turning diameter	mm	Ø240	Ø350	Ø350	Ø450
Max. turning length	mm	255	343	613	621
Chuck diameter	inch	6" (8")	8" (10")	8" (10")	10" (12")
Swing over saddle Chuck size	mm	Ø240	Ø400	Ø400	Ø440
X-axis travel	mm	120+20	175+25	175+25	225+25
Z-axis travel	mm	290	380	650	670
Rapid traverse rate X/Z axis	m / min	24 / 24	24 / 24	24 / 24	20 / 20
Spindle nose	type	A2-5	A2-6	A2-6	A2-8
Spindle speed	rpm	6,000	4,500	4,500	3,500
Spindle bore diameter	mm	Ø56	Ø62	Ø62	Ø88
Through hole draw tube	mm	Ø45	Ø52	Ø52	Ø75
Spindle bearing diameter	mm	Ø90	Ø100	Ø100	Ø130
Spindle taper	MT	MT#6	1:20	1:20	1:20
No. of tools	set	10	8	8	8
Standard O.D. tool size	mm	□20	□25	□25	□25
Max. I.D. tool size	mm	Ø25	Ø40	Ø40	Ø40
Tailstock quill diameter	mm	Ø50	Ø65	Ø65	Ø100
Tailstock quill stroke	mm	80	90	90	100
Tailstock quill taper	MT	MT-3	MT-4	MT-4	MT-4
Spindle motor (30min/continuous)	kW	11 / 7.5	18.5 / 15	18.5 / 15	22 / 18.5
Servo motors (X/Z)	kW	X=1.2 / Z=1.2	X=3.0 / Z=3.0	X=3.0 / Z=3.0	X=3.0 / Z=3.0
Coolant tank capacity	ℓ	115	130	95	95
Floor space	mm	1,795 x 1,317	2,530 x 1,535	2,750 x 1,542	2,920 x 1,685
Machine weight	kg	2,500	3,550	3,850	5,080

*Specifications are subject to change without prior notice.



SLANT BED
CNC TURNING CENTER

FTC-300 / FTC-350(MC) / FTC-350L(MC) / FTC-350XL(MC)
FTC-350LY / FTC-350SLY / FTC-450(MC) / FTC-640(MC) / FTC-640L(MC)
FTB-350 / FTB-350L / FTB350XL

MODEL	UNIT	FTC-300	FTC-350 (MC)/L (MC)/XL (MC)	FTC-350S	FTC-350LY	FTC-350SLY	FTC-450 (MC)	FTC-640(MC)/L(MC)	FTB-350/L/XL
Swing over bed	mm	Ø550	Ø580	Ø650	Ø580	Ø650	Ø670	Ø750	Ø580
Swing over saddle	mm	Ø260	Ø400	Ø450	Ø400	Ø450	Ø450	Ø550	Ø400
Standard turning diameter	mm	Ø180	Ø327 (165)	Ø156	Ø200	Ø200	Ø327 (Ø165)	Ø271 (Ø240)	Ø327
Max. turning diameter	mm	Ø300	Ø350 (235)	Ø300	Ø350	Ø350	Ø450 (Ø270)	Ø640 (Ø470)	Ø400
Max. turning length	mm	320	340 (310)/660(600)/1000(970)	210	585	515	650 (600)	808 (760)/1,440(1,170)	340/660/1000
Bar work capacity	mm	Ø52	Ø52 (Ø52)/ (Ø66)	Ø52 Ø45	Ø52	Ø52 Ø45	Ø78	Ø117.5	Ø52
X-axis travel	mm	150+20	175+25 (188+2)	150+10	175+25	175+10	225+25 (205+2)	320+25 (325+2)	200+25
Y-axis travel	mm	-	-	-	80(±40)	80(±40)	-	-	-
Z-axis travel	mm	350	380 (350)/700(640)/1,040(1,010)	250	625	555	700 (640)	870 (830)/1,500(1,240)	380/700/1040
E-axis travel	mm	-	-	345	-	660	-	-	-
Tailstock travel type	type	Manual	Manual	-	Manual	-	Manual	Programmable	Manual
Tailstock travel	mm	300	290/610/950	-	610	-	610	810/1,440	290/610/950
Tailstock quill travel type	type	Hydraulic	Hydraulic	-	Hydraulic	-	Hydraulic	Hydraulic	Hydraulic
Tailstock quill diameter	mm	Ø50	Ø70	-	Ø70	-	Ø100	Ø110	Ø70
Tailstock quill stroke	mm	80	90	-	90	-	100	100	90
Tailstock quill taper	MT	MT-3	MT-4	-	MT-4	-	MT-4	MT-5	MT-4
Rapid traverse rate X-axis	m/min	24	30	24	24	24	30	20	30
Rapid traverse rate Y-axis	m/min	-	-	-	12	12	-	-	-
Rapid traverse rate Z-axis	m/min	24	30	24	24	24	30	20	30
Rapid traverse rate E-axis	m/min	-	-	12	-	12	-	-	-
Spindle speed	rpm	6000	4500	4500/6000	4500	4500/6000	3500	2000(2 Step)	4500
Spindle nose	type	A2-5	A2-6	A2-6/A2-5	A2-6	A2-6/A2-5	A2-8	A2-11	A2-6
Hydraulic chuck diameter	mm	Ø169 (6")	Ø210 (8")	Ø210 sub:Ø169	Ø210 (8")	Ø210 sub:Ø169	10"	15"	Ø210
Spindle bore diameter	mm	Ø62	Ø62 (Ø76)	Ø62 Ø56	Ø62 (Ø76)	Ø62 Ø56	Ø88	Ø131	Ø62
Spindle bearing diameter	mm	Ø90	Ø100 (Ø110)	Ø100 Ø90	Ø100 (Ø110)	Ø100 Ø90	Ø130	Ø180	Ø100
Spindle taper	mm	MT-6	1:20	1:20 sub:MT#6	1:20	1:20 sub:MT#6	1:20	1:20	1:20
Live tooling speed	rpm	-	- (4000)	-	3,000	3,000	-(4,000)	-(3,000)	-
No. of tools	set	10	8 (12VDI40)/(12)	12	12-VDI30	12VDI30	8 (12VDI40)/(12)	12 (VDI60)	8(12)
Standard O.D. tool size	mm	□20	□25	□20	□20	□20	□25	□32	□25
I.D. tool size (Max.)	mm	Ø25	Ø40	Ø25	Ø32	Ø25	Ø40	Ø50	Ø40
Tool changing time	sec	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3
Spindle motor (cont / 30)	kW	7.5/11	15/18.5 (7.5/15)	15/18.5 sub:5.5/7.5	5/9	5/9 sub:5.5/7.5	13/22	22/26	15/18.5
X / Y / Z / E servo motor	kW	1.6(X) / 1.6(Z)	3(X)/3(Z)	3/-/3/1.6	3/1.6/3	3/1.6/3/3	3(X)/3(Z)	4(X) /4(Z)	3(X)/3(Z)
Live tool power (cont/30)	kW	-	-(2.2/3.7)	-	3	-	-(2.2/3.7)	-(11/15)	-
Positioning accuracy X / Y / Z	μm	10(X)/ 10(Z)	10(X)/ 10(Z)	10/10/10	10/10/10	10/10/10	10(X)/ 10(Z)	10(X)/ 25(Z)	10(X)/10(Z)
Repeatability accuracy X / Y / Z	μm	6(X)/ 6(Z)	6(X)/ 6(Z)	6/6	6/ 6/ 6	6/6/6	6(X)/ 6(Z)	6(X)/ 6(Z)	6(X)/6(Z)
Power capacity	KVA	15	25	40	30	45	30	45	25
Coolant tank capacity	ℓ	100	170/165/194	120	110	150	185	200/350	90/165/194
Machine width	mm	2,500	2,564/2,880/3,500	2,920	2,880	3,235	3,425	3,580 (3,680)/4,280(4,380)	2,564/2,880/3,496
Machine depth	mm	1,530	1,580/1,580/1,665	2,010	1,800	2,010	1,770	2,125	1,580/1,580/1,665
Machine height	mm	1,650	1,945 (2,045)/1,945(2,045)/1,870(2,180)	1,967	2,050	2,205	2,220 (2,280)	2,415 (2,550)/2,550	1,944/1,944/1,869
Machine weight	kg	3,100	3,500 (4,000)/4,000(4,500)/4,500(5,000)	4,000	4,500	5,000	6,000	9,550 (10,050)/10,050(11,000)	3,500/4,000/4,500

*Specifications are subject to change without prior notice.

FT series

CNC
TURNING CENTER
BOXWAY



FT-200 / FT-250 / FT-350 / FT-350AL

MODEL	UNIT	FT-200	FT-250	FT-250SY	FT-350	FT-350AL
Swing over bed	mm	635	635	635	725	725
Swing over cross slide	mm	475	475	475	495	495
Max. turning diameter	mm	330	420	720	620	620
Max. turning length	mm	487	1,037	1,050	1,062	1,520
Bar work capacity	mm	65	77	77 / 51	91	115
Chuck size	inch	8"	10"	10" / 8"	12"	15"
X-axis travel	mm	165 + 10	210 + 20	210+10	310 + 20	310 + 20
Z-axis travel	mm	580	1,120	1,050	1,130	1,630
Max. spindle speed	rpm	4,500	3,500	3,500 / 4,500	3,300	2,000
Spindle nose	type	A2-6	A2-8	A2-8 / A2-6	A2-8	A2-11
Through-spindle hole diameter	mm	76	88	88 / 56	102	131
Spindle bearing inner diameter	mm	110	130	130 / 100	160	180
No. of tools	set	BMT65-12	BMT65-12	BMT 65-12	BMT65-12	BMT65-12
Shank height for square tool	mm	25	25	25	25	25
Shank diameter for boring bar	mm	32	32	32	40	40
Turret indexing time	sec	0.15 / 0.72	0.15 / 0.72	0.15 / 0.72	0.3 / 0.9	0.3 / 0.9
Rapid traverse rate X-axis	mm/min	24,000	24,000	24,000	20,000	20,000
Rapid traverse rate Z-axis	mm/min	24,000	24,000	24,000	20,000	20,000
Tailstock travel	mm	375	900	947	900	1,400
Tailstock spindle diameter	mm	100	100	-	110	110
Tailstock quill stroke	mm	100	100	-	120	120
Taper hole of tailstock spindle	MT	MT-4	MT-4	-	MT-5	MT-5
Main spindle drive motor<cont/30min>	kW	11 / 15	18.5 / 22	18.5 / 22 ; 11 / 15	22 / 30	22 / 26
Rotary tool spindle drive motor<cont./30 min>	kW	3.7 / 5.5	3.7 / 5.5	3.7 / 5.5	3.7 / 5.5	3.7 / 5.5
Servo motors (X / Z)	kW	3 / 3	3 / 3	4 / 4 / 3 / 3	4 / 4	4 / 4
Coolant tank capacity	ℓ	200	250	360	355	420
Floor space	mm	4,240 x 1,900	4,850 x 2,283	5150 x 2135	4,725 x 2,290	5,225 x 2,290
Machine height	mm	1,955	1,955	2,200	2,200	2,200
Machine weight	kg	5,150	6,210	7,550	9,430	10,570

*Specifications are subject to change without prior notice.

HT series

CNC
TURNING CENTER
BOX WAY



HT-30MC / HT-30Y / HT-30SY / HT-40Y

MODEL	UNIT	HT-30Y	HT-30MC	HT-30SY	HT-40Y
Swing over bed / Front door	mm	923.8	923.8	923.8	923.8
Swing over saddle	mm	755	755	755	755
Max. turning diameter	mm	356	356	356	356
Standard turning diameter	mm	275	275	275	275
Max. turning length	mm	705	705	705	705
Bar work capacity	mm	78	78	78 44	90
X-axis travel	mm	260	260	260	260
Y-axis travel	mm	100 (±50)	---	100 (±50)	100 (±50)
Z-axis travel	mm	795	795	795	795
Spindle speed	rpm	3,500	3,500	Main Spindle : 3,500 Sub Spindle : 6,000	3,000
Spindle nose type	type	JIS A2-8	JIS A2-8 (A2-6)	Main Spindle : A2-8 Sub Spindle : A2-5	JIS A2-8
Hole through spindle	mm	88 (76)	88 (76)	Main Spindle : 88 Sub Spindle : 56	102
Min. indexing degree		0.001°	0.001°	0.001°	0.001°
Spindle bearing inner diameter	mm	130	130	130 90	160
Chuck size	inch	10"	10"	10" 6"	12"
No. of tools	set	BMT60, 12	BMT60, 12	BMT60, 12	BMT60, 12
Shank height for square tool	mm	25	25	25	25
Shank diameter for boring bar	mm	40 (50)	40 (50)	40 (50)	40 (50)
Live tooling diameter	mm	20 (26)	20 (26)	20 (26)	20 (26)
Turret indexing time	sec	0.25	0.25	0.25	0.25
Live tooling speed	rpm	3,000	3,000	3,000	3,000
Rapid traverse rate	mm/min	X, Z: 30,000 Y: 10,000 E: 7,000 C: 80 rpm	X, Z: 30,000 Y: None E: 7,000 C: 80 rpm	X, Z, E: 30,000 Y: 10,000 C: 80 rpm	X, Z: 30,000 Y: 10,000 E: 7,000 C: 80 rpm
Tailstock travel	mm	734	734	734	734
Tailstock quill diameter	mm	80	80	-	80
Tailstock Quill inside taper		Live Center (MT5)	Live Center (MT5)	-	MT-5
Spindle motor	kW	13 / 22	13 / 22	13 / 22 7.5 / 11	22 / 30
Live tooling motor	kW	7	7	7	7
Servo motors (X / Y / Z / E)	kW	4 / 4 / 4 / 3	4 / None / 4 / 3	4 / 4 / 4 / 3	4 / 4 / 4 / 3
Power capacity	KVA	50	45	50	50
Coolant tank capacity	ℓ	265	265	265	265
Floor space	mm	3,600 x 1,950	3,600 x 1,950	3,600 x 1,950	3750 x 1950
Machine height	mm	2,190	2,190	2,190	2,190
Machine weight	kg	6,200	6,000	6,500	6,700

*Specifications are subject to change without prior notice.

FVT

series

CNC
VERTICAL LATHE
HEAVY DUTY



FVT-450 / FVT-600(MC) / FVT-800 /
FVT-1000(MC) / FVT-1600

MODEL	UNIT	FVT450	FVT600(MC)	FVT800	FVT1000(MC)	FVT1600
Max. swing diameter	mm	650	710	900	1,100	2,000
Swing over saddle	mm	510	510(500)	650	780	-
Max. turning diameter	mm	460	600(530)	800	1,000	2,000
Max. turning length	mm	500	650(585)	760	850	1,250
Work table diameter	mm	-	-	-	-	1,600
Max. workpiece weight	kg	-	-	-	-	8,000
X axis travel	mm	250	305(270)	425	540	1,160
Z axis travel	mm	500	650	760	850	900
W axis travel	mm	-	-	-	-	600
W-axis positioning step(pitch 200mm)	-	-	-	-	-	4
Rapid traverse rate X-axis	min	24,000	20,000	20,000	20,000	12,000
Rapid traverse rate Z-axis	min	24,000	24,000	20,000	20,000	10,000
Servo motors(X/Z)	kW	3/4	3/4	4/7	4/7	9/7
Spindle nose	type	A2-8	A2-11	A2-11	A2-15	-
Spindle speed	rpm	2,500	2,000	2,000	1,500	2-250
Chuck size	mm	305	381	450	810	-
Through spindle hole dia	mm	57	57	70	90	-
Spindle bearing inner diameter	mm	130	140	160	200	-
Spindle motor	kW	αP40i 18.5/22	αP40i 18.5/22	αP50i 22/30	α40i+ZF 37/45	α40i+gear box 37/45
Ram cross section	mm	-	-	-	-	220X220
ATC	type	Turret	Turret(BMT65)	Turret	Turret (BMT85)	Carousel
No. of tools	set	8(12)	8(12)	12	12	12
Shank height for square tool	mm	□32(25)	□32(25)	□32	□32	□32
Shank diameter for boring bar	mm	Ø50	Ø50	Ø60	Ø80	-
Max. rotary tool speed	rpm	-	4,000(MC)	-	3,000(MC)	-
Rotary tool drive motor	kW	-	α3i 3.7/5.5(MC)	-	α8i 7.5/11(MC)	-
Type of tool shank	-	-	-	-	-	7/24 # BT50
Max. tool length	mm	-	-	-	-	450
Max.tool weight	kg	-	-	-	-	50
Turret indexing time (adjacent tool)	sec	0.6	0.6	0.2	0.2	40
Turret indexing time (180 deg)	sec	1.85	1.85	1	1	40
Fanuc	-	0i TF	0i TF	0i TF	0i TF	0i TF
Machine height	mm	3,300	3,450	3,750	3,550	5,810
Floor space	mm	3,400X1,600	3,400X1,800	4,055X2,210	4,010X2,450	5,235X4,280
Machine weight	kg	7,000	9,000	15,000	18,000	23,500

*Specifications are subject to change without prior notice.

VFP

series

VERTICAL
MACHINING CENTER



VFP-800(A) / VFP-1000(A) / VFP-1300(A)

MODEL	UNIT	VFP-800(A)	VFP-1000(A)	VFP-1300(A)
X Axis Travel	mm	820	1020	1300
Y Axis Travel	mm	520	520	610
Z Axis Travel	mm	505	505	560
Spindle Nose To Table Surface	mm	100-605	80-585	125-685
Spindle Center To Column Surface	mm	560	560	640
Table Dimension	mm	950x520	1150x520	1420x600
Max.loading Weight	kg	800	800	1500
T-slots (W×No.×p)	mm	18x5x100	18x5x100	18x5x100
Spindle Speed	rpm	10000	10000	10000
Spindle Taper	-	7/24 taper NO.40	7/24 taper NO.40	7/24 taper NO.40
Dia. Of Spindle	mm	Ø 70	Ø 70	Ø 70
Spindle Motor	kw	7.5/11	7.5/11	7.5/11
Rapid Traverse X Axis	m/min	36	36	32
Rapid Traverse Y Axis	m/min	36	36	24
Rapid Traverse Z Axis	m/min	30	30	24
No. Of Tools	-	22 (24) (Arm)	22 (24) (Arm)	22 (24) (Arm)
Pull Stud	-	P-40T (45°)	P-40T (45°)	P-40T (45°)
Max. Tool Weight	kg	8	8	8
Max. Tool Length	mm	300	300	250
Max. Tool Diameter	mm	Ø 80	Ø 80	Ø 80
Max. Tool Diameter (No Adjacent Tool)	mm	Ø 150	Ø 150	Ø 150
Tool Changing Time (Tool To Tool)	sec/Hz	1.7/60	1.7/60	1.7/60
Floor Space	mm	2905×2300	3040×2300	3550×2370
Machine Weight	kg	5800	6300	7100
Max. Machine Height	mm	2800	2800	2665
Power Capacity	KVA	35	35	25
Air Source	bar	6~8	6~8	6~8

*Specifications are subject to change without prior notice.

FTC
series

FT
series

HT
series

FVT
series

VFP
series

VMP
series

QMP
series

HV
series

NBP
series

VB
series

U
series

EH
series

FMH
series

TV
series

SVW
series

SDM/SDL
series

SBM
series

SHM
series

SHB
series

VMP

series

VERTICAL
MACHINING CENTER



VMP-23(A) / VMP-23Aapc / VMP-30(A) / VMP-32(A) / VMP-32Aapc
VMP-40(A) / VMP-45(A) / VMP-50(A) / VMP-65(A)

MODEL		UNIT	VMP-23(A)	VMP-23Aapc	VMP-30(A)	VMP-32(A)	VMP-40(A)	VMP-45(A)		VMP-50(A)		VMP-65(A)
								BT40	BT50	BT40	BT50	BT40
X - axis travel		mm	580		760	820	1,020	1,100		1,300		1,650
Y - axis travel		mm	420			520		610				800
Z - axis travel		mm	510			505(Opt.635)		600				800
Spindle nose to table surface		mm	80 ~ 590	135 ~ 645	80 ~ 590	100 ~ 605	80 ~ 585	135 ~ 735		120 ~ 720		70~870
Spindle center to column surface		mm	455			560		660				850
Table surface to floor		mm	820	915	820	920	940	960		975		1,080
Table center to column surface		mm	245 ~ 665			300 ~ 820		355 ~ 965				450~1,250
Table dimensions		mm	420 x 650	410 x 580	420 x 890	520 x 950	520 x 1,150	1,200 x 600		1,420 x 600		1,700x800
Max.loading weight (WxNo.xP)		kg	300	120	300	800		1,500				
T - slot		mm	14 x 4 x 100	35-M12 x P1.75	14mm x 4 x 100	18 x 5 x 100		18 x 5 x 100			18x6x125	
Spindle speed		rpm	10,000					10,000	4,000	10,000	4,000	10,000
Spindle taper		type	7/24 taper No.40					7/24 taper No.40	7/24 taper No.50	7/24 taper No.40	7/24 taper No.50	7/24 taper No.40
Spindle motor		kW	7.5 / 11					7.5/11			15/18.5	
X - axis rapid traverse rate		m/min	36			40		36				
Y - axis rapid traverse rate		m/min	36			40		36				
Z - axis rapid traverse rate		m/min	36			30		24				
Tool changing time (tool-to-tool)	Carrousel	type	7 sec / 60 Hz, 7.1 sec / 50.Hz					7 sec / 60 Hz, 7.1 sec / 50 Hz				
	Arm	type	1.7 sec / 60 Hz, 2.0 sec / 50 Hz					1.7 sec / 60 Hz, 2.0 sec / 50 Hz				
Tool changer		type	Carrousel (Arm type)	(Arm type)	Carrousel (Arm type)							
No. of tools		set	18 (20)	20	18 (20)	22 (24)		24			22(24)	
Pull stud		type	P-40T (45°)					P-40T (45°)	P-50T (45°)	P-40T (45°)	P-50T (45°)	P-40T(45°)
Max. tool weight		kg	7			8		8	15	8	15	8
Max. tool length		mm	250			300		300	350	300	350	300
Max. tool diameter		mm	Ø80					ø80	ø100	ø80	ø100	ø80
Max. Tool diameter (no adjacent tool)		mm	Ø130			Ø150		ø150	ø200	ø150	ø200	ø150
Floor space		mm	1,900 x 2,355	1,900 x 2,730	2,100 x 2,355	2,905 x 2,260	3,040 x 2,260	3,180 x 2,800		3,550 x 2,800		4,400x3,500
Machine weight		kg	3,000	3,900	3,300	5,800	6,300	6,800		7,300		12,300
Max. machine height		mm	2,370	2,520	2,370	2,800	2,800	2,900			3,300	
Power capacity		KVA	30			35		30			30	
Air source		bar	6 ~ 8			6 ~ 8						

*Specifications are subject to change without prior notice.

QMP

series

VERTICAL
MACHINING CENTER
QUICK MILL



QMP-23A / QMP-23Aapc / QMP-30A / QMP-32A / QMP-32Aapc / QMP-40A

MODEL	UNIT	QMP-23A(#30)	QMP-23Aapc(#30)	QMP-30A(#30)	QMP-32A	QMP-32Aapc	QMP-40A
X-axis travel	mm	580		760	820	800	1,020
Y-axis travel	mm	420		420		520	
Z-axis travel	mm	510		510		505	
Spindle nose to table surface	mm	80 ~ 590	135 ~ 645	80 ~ 590	130 ~ 635	148 ~ 653	100 ~ 605
Spindle center to column surface	mm		510			560	
Table surface to floor	mm	820	915	820	940	1,025	970
Table center to column surface	mm		245 ~ 665			300 ~ 820	
Table dimension	mm	650 x 420	580 x 410	890 x 420	520 x 950	500 x 700	520 x 1,150
Max. loading weight	kg	300	120	300	800	200	800
T-slot (W x No. x P)	mm	14x4x100	35-M12 x P1.75	14x4x100	18x5x100	35 - M16 x P2.0	18x5x100
Spindle speed	rpm		50 ~ 12,000			10,000	
Spindle taper	type		7 / 24 taper No. 30			7 / 24 taper No. 40	
Spindle motor	kW		3.7 / 5.5			15 / 18.5 (7.5 / 11)	
X-axis rapid traverse rate	m/min		48			48	
Y-axis rapid traverse rate	m/min		48			48	
Z-axis rapid traverse rate	m/min		48			30	
Tool changing time (tool-to-tool)	sec / Hz		1.0 / 60			1.7 / 60	
			1.25 / 50			2.0 / 50	
Tool changer	type		Arm Type			Arm Type	
Tool selection	methed		Random			Random	
Numbers of tools	set		20			24	
Pull stud	type		P - 30T (45°)			P - 40T (45°)	
Max.tool weight	kg		4			8	
Max.tool length	mm		200			300	
Max.tool diameter	mm		Ø63			Ø80	
Maximum tool diameter (Non-adjacent tool)	mm		Ø100			Ø150	
Floor space	mm	1,900 x 2,355	1,900 x 2,730	2,100 x 2,355	2,905x2,260	3,300 x 3,175	3,040 x 2,260
Machine weight	kg	3,000	3,900	3,300	6,300	7,500	6,600
Max. machine height	mm	2,370	2,520	2,370	2,850	2,980	2,850
Power capacity	KVA		30			35	
Air source	bar		6 ~ 8			6 ~ 8	
APC change time	sec	---	6	---	---	10	---
Pallet change		---	Rotary	---	---	Rotary	---

*Specifications are subject to change without prior notice.

HV series

VERTICAL
MACHINING CENTER
HIGH TECH



HV-32A / HV-32Apc / HV-40A / HV-50A

MODEL	UNIT	HV-32A	HV-32Apc	HV-40A	HV-50A
X - axis travel	mm	800	800	1,000	1,300
Y - axis travel	mm	520	520	520	610
Z - axis travel	mm	505	505	505	600
Spindle nose to table surface	mm	130 ~ 635	148 ~ 653	100 ~ 605	70 ~ 670
Spindle center to column surface	mm	560	560	560	660
Table surface to floor	mm	940	1,025	970	1025
Table center to column surface	mm	300 ~ 820	300 ~ 820	300 ~ 820	355 ~ 965
Table dimensions	mm	950 x 520	500 x 700	1,150 x 520	1420 x 600
Maximum loading weight	kg	800	200	800	1000
T - slot (W x No. x P)	mm	18 x 5 x 100	35-M16 x P2.0	18 x 5 x 100	18 x 5 x 100
Spindle speed	rpm	10,000	10,000	10,000	10,000
Spindle taper	type	7/24 taper No.40	7/24 taper No.40	7/24 taper No.40	7/24 taper No.40
Spindle motor	kW	15 / 18.5	15 / 18.5	15 / 18.5	15 / 18.5
X - axis rapid traverse rate	m/min	60	60	60	48
Y - axis rapid traverse rate	m/min	60	60	60	48
Z - axis rapid traverse rate	m/min	30	30	30	24
Tool changer	type	Arm Type	Arm Type	Arm Type	Arm Type
No. of tools	set	24	24	24	24
Pull stud	degree	P-40T (45°)	P-40T (45°)	P-40T (45°)	P-40T (45°)
Max.tool weight	kg	8	8	8	8
Max.tool length	mm	300	300	300	300
Max.tool diameter	mm	80	80	80	80
Max.tool diam. (No Adjacent tool)	mm	150	150	150	150
Tool changing time (Tool-to-tool)	sec (kg)	1.7 (6)	1.7 (6)	1.7 (6)	1.9 (6)
Floor space	mm	2,905 x 2,260	3,300 x 3,175	3,040 x 2,260	3550 x 2750
Machine weight	kg	6,850	8,050	7,150	7300
Max. machine height	mm	2,850	2,980	2,850	2900
Coolant tank capacity	ℓ	300	270	300	310
Power capacity	KVA	35	35	35	35

*Specifications are subject to change without prior notice.

NBP series

VERTICAL
MACHINING CENTER
BOX WAY



NBP / 1000(A) / 1100(A) / 1300(A)

* Gearhead

MODEL	UNIT	NBP-1000(A)		NBP-1100(A)		NBP-1300(A)	
		BT-40	BT-50	BT-40	BT-50	BT-40	BT-50
X axis travel	mm	1,000		1,100		1,300	
Y axis travel	mm	610		610		610	
Z axis travel	mm	600		600		600	
Spindle nose to table surface	mm	110 ~ 710		125 ~ 725		125 ~ 725	
Spindle center to column surface	mm	660		660		660	
Table surface to floor	mm	985		860		860	
Table center to column surface	mm	355 ~ 965		355 ~ 965		355 ~ 965	
Table dimension	mm	1,150 x 600		1,300 x 600		1,500 x 600	
Max. loadind weight	kg	1,000		1,300		1,300	
T-slot (W x No. x P)	mm	18 x 5 x 100		18 x 5 x 100		18 x 5 x 100	
Spindle speed	rpm	10,000(*8000)	4,000(*8000)	10,000(*8000)	4,000(*8000)	10,000(*8000)	4,000(*8000)
Spindle nose	type	7/24 Taper No.40	7/24 Taper No.50	7/24 Taper No.40	7/24 Taper No.50	7/24 Taper No.40	7/24 Taper No.50
Spindle diameter	mm	Ø 70(*Ø85)	Ø 100(*Ø85)	Ø 70(*Ø85)	Ø 100(*Ø85)	Ø 70(*Ø85)	Ø 100(*Ø85)
Spindle motor	kW	7.5 / 11	15 / 18.5	7.5 / 11	15 / 18.5	7.5 / 11	15 / 18.5
Rapid traverse X axis	m/min	24		24		24	
Rapid traverse Y axis	m/min	24		24		24	
Rapid traverse Z axis	m/min	24		24		24	
Tool changer	type	Carrousel(Arm Type)		Carrousel(Arm Type)		Carrousel(Arm Type)	
No.of tools	set	22(24)	(24)	22(24)	(24)	22(24)	(24)
Pull stud	type	P-40T(45°)	P-50T(45°)	P-40T(45°)	P-50T(45°)	P-40T(45°)	P-50T(45°)
Max. tool weight	kg	8	15	8	15	8	15
Max. tool length	mm	300	350	300	350	300	350
Max. tool diameter	mm	Ø 80	Ø 100	Ø 80	Ø 100	Ø 80	Ø 100
Max. tool diameter(no adjacent tool)	mm	Ø 150	Ø 200	Ø 150	Ø 200	Ø 150	Ø 200
Tool changing time (tool to tool)	carrousel	sec/HZ	7 / 60 7.1 / 50	3.5 / 60 5.5 / 50	7 / 60 7.1 / 50	3.5 / 60 5.5 / 50	7 / 60 7.1 / 50
	Arm	sec/HZ	1.7 / 60 2.0 / 50	1.7 / 60 2.0 / 50	1.7 / 60 2.0 / 50	1.7 / 60 2.0 / 50	1.7 / 60 2.0 / 50
Floor space	mm	3,290 x 2,290		3,410 x 2,685		3,650 x 2,740	
Machine weight	kg	7,000		7,500		8,000	
Max. machine height	mm	2,900 (*3,030)	3,135 (*3,030)	2,700(*2,930)	3,035(*2,930)	2,700(*2,930)	3,035(*2,930)
Power capacity	KVA	35		35		35	
Air source	bar	6 ~ 8		6 ~ 8		6 ~ 8	

*Specifications are subject to change without prior notice.

VB series

VERTICAL
MACHINING CENTER
BOX WAY



VB-1400(A) / VB-1650(A) / VB-1900(A) / VB-2200(A)

* Gearhead

MODEL	UNIT	VB-1400(A)		VB-1650(A)		VB-1900A	VB-2200A
X-axis travel	mm	1,400		1,650		1,900	2,200
Y-axis travel	mm	800(4 way)		800(4 way)		860(4 way)	960(6 way)
Z-axis travel	mm	700		800			
Spindle nose to table Surface	mm	145~845		235~1,035			
Spindle center to column surface	mm	850		850		950	1,050
Table dimension	mm	1,650x800		1,900x800		2,100x860	2,400x960
T-slot (W x No. x P)	mm	22x6x125		22x6x125		22x6x125	22x6x160
Max. loading weight	kg	1,500		1,800		2,200	2,700
Spindle speed	rpm	4,000(OPT:6,000) (*6,000)	8,000	4,000(OPT:6,000) (*6,000)	8,000	4,000(OPT:6,000) (*6,000)	
Spindle taper	type	7/24 Taper No.50	7/24 Taper No.40(OPT)	7/24 Taper No.50	7/24 Taper No.40(OPT)	7/24 Taper No.50	
Spindle motor	kW	7.5 / 15 (*18.5 / 22)		11 / 18.5 (*18.5 / 22)			
Rapid traverse rate (X / Y / Z axis)	m/min	20 / 20 / 18		15 / 15 / 12			
Cutting feedrate	m/min	15		12			
Tool changing time (tool-to-tool)	Arm type	sec / Hz	3.5 / 60	1.7 / 60	3.5 / 60	1.7 / 60	3.5 / 60
	Carrousel type	sec / Hz	9 / 60	8 / 60	9 / 60	8 / 60	-
Tool changer	type	Arm type (Carrousel type)				Arm type	
No. of tools	set	24 / (20)	24 / (22)	24 / (20)	24 / (22)	32(OPT:40)	
Pull stud	type	P-50T(45°)	P-40T(45°)	P-50T(45°)	P-40T(45°)	P-50T(45°)	
Max. tool weight	kg	15 / (15)	8 / (6)	15 / (15)	8 / (6)	15	
Max. tool length	mm	300	250	300	250	300	
Max. tool diameter	mm	Ø100	Ø80	Ø100	Ø80	Ø100	
Max. tool weight (no adjacent tool)	mm	Ø200	Ø150	Ø200	Ø150	Ø200	
Floor space	mm	4,665x3,175		4,790x3,175		5,300x3,775	5,600x3,825
Machine weight	kg	12,000		13,000		19,000	22,000
Max. machine height	mm	3,300		3,505			
Power capacity	KVA	35		35			
Air source	bar	6~8		6~8			

*Specifications are subject to change without prior notice.

U series

5-AXIS VERTICAL
MACHINING CENTER



U-250 / U-600P / U-800 / U-1000

MODEL	UNIT	U-250	U-600P	U-800	U-1000
X axis travel	mm	350	460	800	1,250
Y axis travel	mm	300	620	935	1,250
Z axis travel	mm	250	400	640	1,000
Rotary axis rotation angle	degree	0°~360°	0°~360°	0°~360°	0°~360°
Tilting axis rotation angle	degree	+120° ~ -120°	+110° ~ -90°	+120° ~ -120°	+30° ~ -180°
Spindle nose to table surface Z axis	Vertical spindles =0	mm	135-385	150-550	80-725
	Horizontal spindles =180	mm	-	-	-
Table surface to floor	mm	860 ± 5	750 ± 5	900 ± 5	1,462 ± 5
Table dimension	mm	Ø250	Ø600	Ø800	1,000x1,000
Table hole dimensions	mm	Ø20 H7	Ø60 H7	Ø60 H7	Ø55 H7
T slots	mm	6x12	5x14	7x14	M20x2.5
Max. table load	kg	70	350	1,200	2,000
Working torque	Rotary axis	N-m	600	672	1,230
	Tilting axis	N-m	1,800	2,520	3,340
Max. rotation speed	Rotary axis	min ⁻¹	66.7	25	100
	Tilting axis	min ⁻¹	33.3	25	50
Max. diameter of workpiece	mm	Ø350x250(H)	Ø600x400(H)	Ø800x640(H)	Ø1,000x1,600(H)
Spindle speed	min ⁻¹	Direct-drive type 10,000	Direct-drive type 10,000	Direct-drive type 12,000	Built-in spindle 8,000
Spindle taper	-	7/24 Taper NO.30	7/24 Taper NO.40	7/24 Taper NO.40	7/24 Taper NO.50
Spindle power	Kw	3.7 / 5.5	7.5 / 11	20 / 37	28 / 50
X-axis rapid traverse	m/min	36	30	48	50
Y-axis rapid traverse	m/min	36	30	48	50
Z-axis rapid traverse	m/min	36	30	48	50
Tool changing time (tool-to-tool)	sec	4 / 60Hz	7 / 60Hz	10 / 60Hz	3.2 / 60Hz
Tool changer	-	Drum type	Arm type	Drum type	Arm type
No. of tools	-	26	24 (30、40、60)	32 (48、64、96、128)	40 (60)
Pull stud	-	MAS-1 (45°)	P-40T (45°)	P-40T (45°)	P-50T (45°)
Max. tool weight	Kg	3	7	7	30
Max. tool length	mm	150	280	300	500
Max. tool diameter	mm	φ 60	φ 80	φ 75	φ 125
Max. tool diameter (No adjacent tool)	mm	φ 65	φ 150	φ 125	φ 250
Floor space	mm	1,725X3,360	3,650X3,500	3,220X4,030	4,680X7,480
Machine weight	Kg	4,000	8,600	18,500	38,000
Max. machine height	mm	2,800	3,000	3,600	4,870
Power capacity	KVA	25	40	90	150
Air source	bar	6~8	6~8	6~8	6~8

*Heavy tool definition: over 15kg tools. *Specifications are subject to change without prior notice.

EH

series

HORIZONTAL
MACHINING CENTER
HIGH TECH



EH-320 / EH-320APC

MODEL	UNIT	EH-320	EH-320APC
X-axis travel	mm	300	300
Y-axis travel	mm	320	320
Z-axis travel	mm	270	270
B-axis rotation angle	degree	360	360
Spindle center to table surface	mm	50~320	50~300
Spindle nose to table center	mm	120~390	120~390
Table surface to floor	mm	1,160	1,160
Table dimension	mm	Ø350	320 x 320
Max. loading weight	kg	300	200~500
Screw specifications	type	24-M12 x P1.75	24-M12 x P1.75
Min Indexing angle	degree	90° (4dposition)	1° (1/1000°)
Spindle speed	rpm	10,000	10,000
Spindle nose taper	type	BT-40	BT-40
Spindle motor	kw	5.5 / 7.5	5.5 / 7.5
Rapid traverser rate X Axis	m/min	48	48
Rapid traverser rate Y Axis	m/min	48	48
Rapid traverser rate Z Axis	m/min	48	48
Cutting feedrate	m/min	20	20
No. of tools	set	16	16
Pull stud	type	P40T-1(45°)	P40T-1(45°)
Max. tool weight	kg	8	8
Max. tool length	mm	220	220
Max. tool diameter	mm	Ø70	70
Max. tool diameter (No adjacent tool)	mm	Ø120	Ø120
Tool changing time (Tool to tool)	sec (Hz)	1.9(60)	1.9(60)
Number of pallets	set	1	2
Method of pallet change	type	-	Rotary
Pallet change time	sec	-	8
Floor space	mm	1,600 x 2,900	1,600 x 3,400
Machine weight	kg	2,800	3,500
Max. machine height	mm	2,500	2,500
Power capacity	kVA	40	40
Air source	bar	6~8(85 psi)	6~8(85 psi)

*Specifications are subject to change without prior notice.

FMH

series

HORIZONTAL
MACHINING CENTER



FMH-400 / FMH-500 / FMH-630 / FMH-800 / FMH-1000

MODEL	UNIT	FMH-400	FMH-500 No.40	FMH-500 No.50 (DDS)	FMH-500 No.50 (BELT)	FMH-500Premium No.40	FMH-630	FMH-800	FMH-1000
X-axis travel	mm	610	762	730		762	1,000	1,300	1,300
Y-axis travel	mm	560	710		710	850	1,020	1,020	1,020
Z-axis travel	mm	560	710		800	850	1,100	1,100	1,100
Spindle center to table surface	mm	50 ~ 610	50 ~ 760		50~760	50 ~ 900	100 ~ 1,120	60~1,080	
Spindle nose to table center	mm	130 ~ 690	150 ~ 860	100 ~ 810		100~900	200 ~ 1,050	150 ~ 1,250	150 ~ 1,250
Table surface to floor	mm	1,140	1,200		1,050	1,300	1,475	1,515	
Table dimension	mm	400 x 400	500 x 500		500 x 500	630 x 630	800 x 800	1000x1000	
Max. loading weight	kg	400	1°: 500 kg / 0.001°: 600 kg			1,200	2,000	2,000	
Screw specifications	type	M16 x P2	M16 x P2		M16XP2	M16 x P2	M16 x P2	M20xP2.5	
Min. indexing degree	deg.	1° / OPT: 0.001°	1° / OPT: 0.001°		1° / OPT: 0.001°	1° / OPT: 0.001°	1° / OPT: 0.001°/5°	1° / OPT: 0.001°	
Spindle speed	rpm	8,000 / 10,000 (OPT)	8,000 / 10,000 (OPT)	6,000 / 8,000 (OPT)		10,000 15,000(OPT)	6,000 / 8,000 (OPT)	6,000 / 8,000 (OPT)	6,000 / 8,000 (OPT)
Spindle taper	type	7/24 Taper No.40	7/24 Taper No.40	7/24 Taper No.50		7/24 Taper no.40	7/24 Taper No.50	7/24 Taper No.50	7/24 Taper No.50
Spindle diameter	mm	Ø85	Ø85	Ø90	Ø100	Ø85	Ø100	Ø110	Ø110
Spindle motor	kW	(Built in) 7.5 / 11	(Built in) 7.5 / 11	(DDS) 15 / 18.5	(Built in) 7.5/15	15/18.5(DDS) 18.5/22(Built in)(OPT)	11 / 18.5	22 / 26	22 / 26
Rapid traverse X-axis	m/min	30(60)	30(48)		48(60)	24(42/48)	42	42	
Rapid traverse Y-axis	m/min	30(60)	30(48)		48(60)	24(42/48)	42	42	
Rapid traverse Z-axis	m/min	30(60)	30(48)		48(60)	24(42/48)	42	42	
Cutting feedrate	m/min	20	20		20	15(20)	20	20	
No. of tools	set	40:60/120 (OPT)	40: 60/90 (OPT)		40: 60/90 (OPT)	40:60/120(OPT)	40: 60/90 (OPT)	60 : 90/120 (OPT)	60 : 90/120 (OPT)
Pull stud (degree)	type	P40T-1	P40T-1	P50T-1	P50T-1	P40T-1	P50T-1	P50T-1	P50T-1
Max. tool weight	kg	8	8	20	20	12	20	0~15/15~25	0~15/15~25
Max. tool length	mm	300	300	500	500	550	500	500	500
Max. tool diameter	mm	Ø85	Ø85	Ø125	Ø125	Ø95	Ø125	Ø125	Ø125
Max. tool diameter (no adjacent tool)	mm	Ø140	Ø140	Ø220	Ø220	Ø190	Ø220	Ø250	Ø250
Tool changing time (tool to tool)	sec (Hz)	2 (60)	2 (60)	8 (60)	8 (60)	1.3(60)	8 (60)	3.5 (60) 4.7(60)	3.5 (60) 4.7(60)
Number of pallets	set	2	2		2	2	2	2	2
Method of pallet change	type	Rotary	Rotary		Rotary	Rotary	Rotary	Rotary	Rotary
Pallet change time	sec (Hz)	8 (60)	8 (60)		8 (60)	10 (60)	20 (60)	20 (60)	20 (60)
Floor space	mm	2,610 x 4,750	3,050X5,120	3,210 x 5,120	3,210X5,120	3,150 x 5,120	4,130 x 6,624	4,900 x 7,745	4,900 x 7,745
Machine weight (net)	kg	8,500	13,500	15,000	16,000	14,000	19,000	30,000	30,000
Max. machine height	mm	2,730	2,915	3,280	3,280	2,915	3,661	4,060	4,060
Power capacity	KVA	40	40		40	65	70	70	
Air source	bar	6~8 (85 psi)	6~8 (85 psi)		6~8 (85 psi)	6~8 (85 psi)	6~8 (85 psi)	6~8 bar (85 psi)	6~8 bar (85 psi)

*Heavy tool definition: over 15kg tools. *Specifications are subject to change without prior notice.

FTC
series

FT
series

HT
series

FVT
series

VFP
series

VMP
series

QMP
series

HV
series

NBP
series

VB
series

U
series

EH
series

FMH
series

TV
series

SVW
series

SDM/SDL
series

SBM
series

SHM
series

SHB
series

TV

series

DRILLING &
TAPPING CENTER



510A / TC-20α

MODEL	UNIT	TV-510A (Arm Type ATC)	TC-20α
X-axis travel	mm	510	510
Y-axis travel	mm	400	400
Z-axis travel	mm	400	300
Spindle nose to table surface	mm	170 ~ 570	174 ~ 474
Spindle center to column surface	mm	430	455
Table dimension	mm	650 x 400	600 x 400
Max. loading weight	kg	250 kg (200 kg for 60 m/min)	250(200 kg for 60 m/min)
T-slot	mm	14 x 3 x 125	14 x 3 x 125
Spindle speed	rpm	10,000 (DDS:12,000 & 15,000)	DDS 12,000
Spindle taper	type	7/24 Taper No.30	7/24 Taper No.30
Spindle motor	kW	3.7 / 5.5 (2.2 / 3.7)	3.7 / 5.5 (2.2 / 3.1)
Rapid traverse X-axis	m/min	36	36
Rapid traverse Y-axis	m/min	36	36
Rapid traverse Z-axis	m/min	48	48
No. of tools	set	20	14
Pull stud	type	P-30T (45°)	P-30T(45°)
Max. tool weight	kg	3	3 / 25(total tool weight)
Max. tool length	mm	200	200
Max. tool diameter	mm	Ø63	Ø80
Max. tool diam. (no adjacent tool)	mm	Ø100	Ø150
Tool changing time (tool-to-tool)	sec (Hz)	1.9 sec (60Hz) 2.2 sec (50Hz)	1.5 sec(60Hz)
	sec (Hz)	DDS: [1 sec (60Hz) 1.2 sec (50Hz)]	1.8 sec(50Hz)
Floor space	mm	1,600 x 2,150	1,600 x 2,265
Machine weight	kg	2,200	2,400
Max. machine height	mm	2,350	2,555
Power capacity	KVA	15	15
Air source	bar	6 ~ 8	6 ~ 8

*Specifications are subject to change without prior notice.

SVW

series

DOUBLE COLUMN
MACHINING CENTER



SVW-2217

MODEL		UNIT	SVW-2217	SVW-2817	SVW-2822	SVW-3217	SVW-3222	SVW-3223	SVW-4217	SVW-4222	SVW-4223
TABLE											
Overall size		mm	2000X1400	2600X1400	2600X1800	3000X1400	3000X1800	3000X2000	4000X1400	4000x1800	4000x2000
T slots		mm	22								
Max. loading		ton	8	9	11	10	12	12	14	15	15
TRAVEL											
X axis		mm	2200	2800		3200			4200		
Y axis		mm	1600		2100	1600	2100		1600	2100	
Z axis		mm	800(1000)								
DISTANCE											
Between two columns		mm	1700	1700	2200	1700	2200	2300	1700	2200	2300
Spindle nose to table top	Z axis 800	mm	240~1040								
	Z axis 1000	mm	240~1240								
SPINDLE											
Speed		rpm	6000(4000)								
Taper			BT/DIN/CAT 50(#40)								
Motor (cont/30min)		kW	15/18.5(22/26)								
ATC											
No. of ATC		tools	24(32/40/60)								
Max. Dia of tool		mm	ø110(with adjacent tool) / ø200(without adjacent tool)								
Max. length of tool		mm	350								
Max. tool weight		kg	15								
FEED RATE											
Rapid feedrate X/Y/Z		m/min	15/15/15			12/15/15					
Cutting feedrate		mm/min	1~10000								
Min. Setting		mm	0.001								
COOLANT & LUBRICATION											
Hydraulic tank volume		L	70								
Lubrication tank volume		L	8								
Coolant tank volume		L	584		680	584	680		584	680	
MISCELLANEOUS											
Machine weight		tons	21	24	26	26	32	35	38	43	45
Power required		kVA	40						50		
Compressed air pressure		kg/cm ²	7								
Compressed oil pressure		kg/cm ²	70								
Floor space	Length	mm	6350	7550		8850			10350		
	Width	mm	5000		5500	5000	5500	5700	5000	5500	5700
Controller			FANUC Oi-M (32i-M / 31i-M) MITSUBISHI (M80/M800) 、SIEMENS (840DSL/828D) HEIDENHAIN (TNC 530HSCI/TNC840/TNC820)								

*Specifications are subject to change without prior notice.

SDM

series

DOUBLE COLUMN
MACHINING CENTER

(B): Distance between two columns : 2500mm
3 linear guide ways being mounted on X axis
(SDM-3225B / SDM-4225B / SDM-5225B)

MODEL	UNIT	SDM-2216	SDM-2220	SDM-3216	SDM-3220	SDM-3225	SDM-3225B	SDM-3228	SDM-4216	SDM-4220	SDM-4225	SDM-4225B	SDM-4228	SDM-4232	SDM-5220	SDM-5225	SDM-5225B	SDM-5228	SDM-5232	SDM-5235	SDM-6232	SDM-6235	SDM-7232	SDM-7235				
TABLE																												
Overall size	mm	2000X1400	2000X1700	3000X1400	3000X1700	3000X2000	3000X2200	3000X2500	4000X1400	4000X1700	4000X2000	4000X2200	4000X2500	4000X2900	5000X1700	5000X2000	5000X2200	5000X2500	5000X2900	5000X3000	6000X2900	6000X3000	7000X2900	7000X3000				
T slots	mm											22																
Max. loading	ton	6	7	9	10	11	12	12	10	12	12	14	14	14	15	15	18	18	20	20	20	24	20	24				
TRAVEL																												
X axis	mm	2200		3200					4200																			
Y axis	mm	1400	1800(2400)	1400	1800(2400)	2400(3000)		3300	1400	1800(2400)	2400(3000)		3300	3700	1800(2400)	2400(3000)		3300	3700	4000	3700	4000	3700	4000				
Z axis	mm	750(900/1200)										900(1200)																
DISTANCE																												
Between two columns	mm	1600	2000	1600	2000	2500		2800	1600	2000	2500		2800	3200	2000	2500		2800	3200	3500	3200	3500	3200	3500				
Spindle nose to table top	mm	1.ISO-50 Standard spindle: 220~970mm (Z = 750mm)／270~1170mm (Z = 900mm)／270~1470mm (Z = 1200mm) 2.ISO-50 Long spindle: 70~820mm (Z = 750mm)／120~1020mm (Z = 900mm)／120~1320mm (Z = 1200mm) 3.ISO-40 D.D.S. standard spindle: 128~878mm (Z = 750mm)／178~1078mm (Z = 900mm)／178~1378mm (Z = 1200mm) 4.ISO-50 D.D.S. standard spindle: 190~940mm (Z = 750mm)／240~1140mm (Z = 900mm)／240~1440mm (Z = 1200mm)										1.ISO-50 Standard spindle: 220~970mm (Z = 750mm)／270~1170mm (Z = 900mm)／270~1470mm (Z = 1200mm) 2.ISO-50 Long spindle: 70~820mm (Z = 750mm)／120~1020mm (Z = 900mm)／120~1320mm (Z = 1200mm) 3.ISO-40 D.D.S. standard spindle: 128~878mm (Z = 750mm)／178~1078mm (Z = 900mm)／178~1378mm (Z = 1200mm) 4.ISO-50 D.D.S. standard spindle: 190~940mm (Z = 750mm)／240~1140mm (Z = 900mm)／240~1440mm (Z = 1200mm)																
SPINDLE																												
Speed	rpm											4000/6000																
Motor (cont/30min)	kW	FANUC 15/18.5(22/26)/SIEMENS 15/20.5(22/30)/HEIDENHAIN15/20.5(20/30)										FANUC 15/18.5(22/26)/SIEMENS 15/20.5(22/30)/HEIDENHAIN15/20.5(20/30)																
Taper												BT/DIN/CAT 50(BT/DIN/CAT 40)																
FEED RATE																												
Rapid feedrate X/Y/Z	mm / min											1 - 5000																
Cutting feedrate	m / min	12 (15) / 12 (15) / 10 (12)															10(15)/12(15)/10(12)					10(12)/10(12)/10(12)						
Min. Setting	mm											0.001																
ATC																												
No. of ATC												24(32/40/60)																
Max. length of tool	mm											350																
Max. tool weight	kg											15																
Max.Dia of Tool with adjacent tool	mm											φ 110 (with adjacent tool)																
Max.Dia of Tool without adjacent tool	mm											φ 200 (without adjacent tool)																
COOLANT & LUBRICATION																												
Coolant tank volume	L	450	620	450	620	760		840	450	620	760		840	620	760		840	920		980	1060	980	1060					
Hydraulic tank volume	L	70										70																
Lubrication tank volume	L											8																
MISCELLANEOUS																												
Machine weight	tons	22	26.5	25.5	29	32	38	40	30.5	34.5	38	42.5	45.5	52	38	43	49	53	55	56	70	72	77	82				
Power required	kVA											50																
Compressed air pressure	kg / cm ²											7																
Compressed oil pressure	kg / cm ²											70																
Controller		FANUC Oi-M(32i-M/31i-M) MITSUBISHI (M80/M800)										SIEMENS (828D / 840DSL) HEIDENHAIN (iTNC 530HSCI / TNC640 / TNC620)																

*Specifications are subject to change without prior notice.

SBM

series

CNC BED TYPE
UNIVERSAL MILLING MACHINE



SBM-2000H / 2500H / 3000H / 3500H

MODEL	UNIT	SBM-2000H	SBM-2500H	SBM-3000H	SBM-3500H
TRAVEL					
X-axis travel	mm	2,000	2,500	3,000	3,500
Y-axis travel (Up and Down)	mm	1,200 (1,500)			
Z-axis travel (Forward and Backward)	mm	1,000			
Distance from table top to spindle center	mm	295~1,495 (295~1,795)			
Distance from table center to spindle nose	mm	-801~199			
TABLE					
Overall size	mm	2100×1000	2700×1000	3100×1000	3,600×1000
Max. loading weight	kg	5,000	6,000	7,000	8,000
T-slot	mm	22T×7×125			
Height from floor to table top	mm	1,005			
SPINDLE					
Taper		BT-50			
Speed	rpm	4,000 (6,000)			
Motor (cont/30min)	kW	15/18.5 (22/26)			
FEED RATE					
Rapid traverse X/Y/Z	mm/min	10,000			
Cutting feedrate	mm/min	1~5,000			
Min. Setting	mm	0.001			
MISCELLANEOUS					
Electrical power supply	kVA	50			
Compressed air pressure	kg/cm²(psi)	6 (85)			
Compressed oil pressure	kg/cm²(psi)	96(1,392)			
Compressed air flow rate	L/min	30			
Hydraulic tank volume	L	80			
Lubricant tank volume	L	8			
Coolant tank volume	L	360			
Controller	-	FANUC 32i-M (31i)			
FLOOR SPACE					
Max. machine height	mm	3,530			
Floor space	mm	4,800x5,560	4,800x6,560	4,800x7,560	4,800x8,560
Machine weight	kg	15,000	16,000	18,800	20,000

*Specifications are subject to change without prior notice.



SBM-2000V/2500V/3000V/3500V

MODEL	UNIT	SBM-2000V	SBM-2500V	SBM-3000V	SBM-3500V
TRAVEL					
X-axis travel	mm	2,000	2,500	3,000	3,500
Y-axis travel (Up and Down)	mm	1,000			
Z-axis travel (Forward and Backward)	mm	1,200 (1,500)			
Distance from table top to spindle center	mm	Horizontal 94~1294 (94~1,544) Vertical 44~1244 (44~1,544)			
Distance from table center to spindle nose	mm	Horizontal -481~519 Vertical -531~469			
TABLE					
Overall size	mm	2100×1000	2700×1000	3100×1000	3,600×1000
Max. loading weight	kg	5,000	6,000	7,000	8,000
T-slot	mm	22T×7×125			
Spindle nose to table top	mm	1,005			
SPINDLE					
Taper		BT-50			
Speed	rpm	3,500 (4,500)			
Motor (cont/30min)	kW	15/18.5 (22/26)			
FEED RATE					
Rapid feedrate X/Y/Z	mm/min	10,000			
Cutting feedrate	mm/min	1~5,000			
Min. Setting	mm	0.001			
MISCELLANEOUS					
Electric power supply	kVA	50			
Compressed air pressure	kg/cm²(psi)	6 (85)			
Compressed oil pressure	kg/cm²(psi)	96 (1,392)			
Hydraulic tank volume	L/min	30			
Hydraulic tank volume	L	80			
Lubricant tank volume	L	8			
Coolant tank volume	L	360			
Controller	-	FANUC 32i-M (31i)			
FLOOR SPACE					
Max. machine height	mm	3,530			
Floor space	mm	4,800x5,560	4,800x6,560	4,800x7,560	4,800x8,560
Machine weight	kg	15,000	16,000	18,800	20,000

*Specifications are subject to change without prior notice.

SHM

series

CNC HORIZONTAL BORING
& MILLING MACHINE



SHM-630L / 800 / 800L

MODEL	UNIT	SHM-630L	SHM-800L	SHM-800
TABLE				
Overall size	mm	630 x 630(700 x 700 / 700 x 900)	800 x 800(800 x 1,000 / 1,000 x 1,000)	800 x 800(800 x 1,000)
T slots	mm	20 x5	22 x7	
Max. loading	kg	1,500	3000	
Table surface to floor	mm	1,130	1,190	1,200
Indexing Degree	°		1° / 360	
Clamping Force	kg-m		5,000	
TRAVEL				
X axis	mm	1 400 (1,200)	1,500	2000
Y axis	mm	1,150 (950)	1,600 (1,180)	1,100(1,500)
Z axis	mm	1,000 (800)	1,200 (1,000)	1,200
DISTANCE				
Spindle Nose to Table Center	mm	300~1,300(300~1,100)	225~1,425 (225~1,225)	300~1,500(300~1,700)
Spindle Center to Table Top	mm	0~1,150(0~950)	0~1,600(0~1,200)	0~1,100(0~1,500)
SPINDLE				
Taper	mm		BT/DIN/CAT 50	
Speed	rpm		4,000 (6,000)	
FEED RATE				
Rapid traverse X/Y/Z	m/min	15/15/15	24/24/24	10/10/10
Cutting feedrate	mm/min		1~5,000	
Min. Setting	mm		0.001	
ACT				
No. of ATC	tool		40 (60)	
Max. length of tool	mm		400	
Max. tool weight	kg		35	
Max. Dia of tool	mm		ø125 (with adjacent tool)/ -ø245 (without adjacent tool)	
Tool selection			Fixed type	
MOTORS				
Spindle motor	kW	7.5/11(11/15)	11/15(15/18.5)	
X/Y/Z/B motor	kW	3/3/4/4		4/4/4/4
Lubricator motor	kW		0.025	0.025
MISCELLANEOUS				
Air consumption	kg/cm ²		6	
Power required	kVA		40	
Hydraulic tank volume	L	40	70	
Lubrication tank volume	L		4.6	
Coolant tank volume	L	300	400	
MACHINE DIMENSION				
Machine outline	mm	4,250 x 5,350 x 3,200	5,300 x 5,300 x 3,750	6,070 x 5,510 x 3,800
Machine weight	kg	12,000	14,000	14,600

*Specifications are subject to change without prior notice.

SHB

series

CNC HORIZONTAL BORING &
MILLING MACHINE
(EXTENDABLE SPINDLE)



SHB-11025/11030/11040RS / SHB-11030/11040RM
SHB-13025/13030/13040RS / SHB-13030/13040 RM/RL

		Column Fixed		Column Moving										
MODEL	UNIT	SHB-11020RF	SHB-11025RS	SHB-11030RS	SHB-11040RS	SHB-11030RM	SHB-11040RM	SHB-13025RS	SHB-13030RS	SHB-13040RS	SHB-13030RM	SHB-13040RM	SHB-13030RL	SHB-13040RL
TABLE														
Overall size	mm	1,000x1,200	1,400x1,600 (1,600x1,800)			1,800x2,000		1,400x1,600 (1,600x1,800)			1,800x2,000		3,200x1,800	
Max. loading	ton	5	7(10)			15(20)		7(10)			15(20)			
T-slots	mm	22x9	24x7			28x9		24x7			28x9			
Height from ground	mm	1,235	1,228			1,440		1,228			1,440			
B-axis min. increment	°	0.001°	0.001° ~ ±5°											
TRAVEL														
X axis	mm	2,000	2,500	3,000	4,000	3,000	4,000	2,500	3,000	4,000	3,000	4,000	3,000	4,000
Y axis	mm	1,600	1,800 (2,000 / 2,300 / 2,500)											
Z axis	mm	1,400(1,200)	1,500 (1,700)											
W axis	mm	400	500 (700)					700(900)						
Spindle nose to table center	mm	400~1,600	500~2,000 (2,200)			785~2,285 (2,485)		585~2,085 (2,285)			785~2,285 (2,485)			
SPINDLE														
W spindle diameter	mm	110						130						
Speed	rpm	5~2,500	3,200					2,700						
Taper	mm	TAPER 7/24												
FEED RATE														
Rapid traverse X/Y/Z	m/min	10 / 10 / 10 / 5	10 / 12 / 12 / 5											
Cutting feedrate	mm/min	1~5,000												
Motor														
Spindle (cont/30min)	kW	15 / 18.5 (22 / 26)	22 / 26 (30 / 37)											
XY/Z/W/B axis feed motor	kW	7 / 7 / 7 / 3 / 7	7 / 7 / 9 / 3 / 7			9 / 7 / 9 / 3 / 7		7 / 7 / 9 / 3 / 7			9 / 7 / 9 / 3 / 7			
ACT														
No. of ATC	tools	40(60)												
Taper	-	BT50(CAT50/DIN50)												
Pull stud	-	MAS403-P50T-1(CAT50/DIN50)												
Tool selection	-	fixed type												
Max. tool diameter(adjacent tool)	mm	φ 125												
Max. tool diameter(no adjacent tool)	mm	φ 245												
Max. tool weight	kg	35												
Max. length of tool	mm	400												
MISCELLANEOUS														
Power required	kVA	60	60			70		60			70			
Hydraulic tank volume	L	70	110											
Coolant tank volume	L	400	500											
Lubrication tank volume	L	8												
Machine weight	kg	21,000	32,000	33,000	34,000	33,000	34,000	40,000	42,000	46,000	42,000	46,000	47,000	51,000
CNC Controller	-	FANUC/ MITSUBISHI/ SIEMENS/ HEIDENHAIN												
Floor space														
Machine height	mm	4,200	4,125(4,325/4,625/4,825)			4,340(4,540/4,840/5,040)		4,125 (4,325/4,625/4,825)			4,340(4,540/4,840/5,040)			
Machine length	mm	6,063	7,184	7,734	8,834	7,490	9,040	7,184	7,734	8,834	7,490	9,040	9,040	10,140
Machine width	mm	6,608	6,526 (6,726)			6,834 (6,834)		6,475 (6,522)			6,682 (6,882)			

*Specifications are subject to change without prior notice.